PROFESSIONAL LAUNDRY



Drying cabinet DC6-4

Drying Cabinets have no mechanical action and are used to efficiently dry bulky items such as workwear/overalls/gloves and boots or delicate items such as silk and linen

Priority on people

Ergonomic design, with user friendly positioning of door handle, control panel and suitable for disabled users

- Easy operation with 2 automatic drying programs, which will stop once the load is dry
- Relief script
- Insulated doors for quiet operation and robust design
- 30 extensible hangers for easy loading/unloading
- Flexible installation with adjustable feet
- · Reversible door left or right hanging

Productivity

Time saving when used instead of flat or hang drying. The door can be opened a short moment without stopping the drying process

Safety

Option to activate child safety start lock and the magnetic edge of doors eliminates risk of children being locked in.

Accessories

Shoe rack to make it easier to dry shoes and boots. Shoe rack: 988704087, 432730568 Glove hanger for more efficient drying of gloves, hats etc. Glove hanger: 988704085, 432730569



Main specifications		DC6-4
Rated capacity	kg	4
Evaporation*	g/min	19
Drying time cotton*	min	105
Rated input	kW	1.5
Energy/load of linen	kWh/kg	0.6
Energy/water evaporated	kWh/l	1.27

Applies to 4 kg dry weight cotton with 50% residual moisture.


Electrical connection	DC6-4		
Voltage			
230V 1AC 50-60 H	1.5(10)		
Connections			
Outlet Evacuated air quantity	ø mm m³/h	100 50	
Sound level			
Sound power/pressure level at drying*	dB(A)	57/41	
Weight			
	net kg	56	
Dimensions in mm			
A Width B Depth C Height D E F G H I J K L		595 605 1900 1915 15 60 255 1090 300 100 850 130	
 Operating panel Air outlet** 			

Colour of front and side panels is silver grey and handle is dark blue.

* Sound power levels measured according to ISO 60704.
 ** Connected with supplied drive interruption and hose.





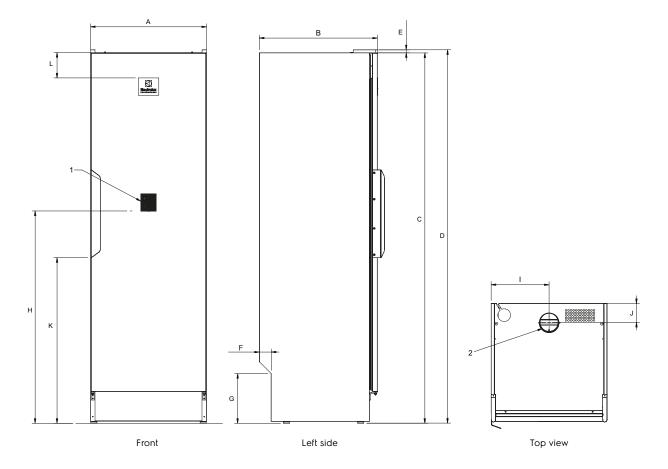



Experience the Excellence www.electroluxprofessional.com