

DTT-18/23 ECO-ENERGY TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touch II
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With
new drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system
THERMAL INSULATION - Complete air-flow circuit
Double door glass
FULL FLOW - New 'optimized' system of mixed
airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING



CONNECTIVITY

IoT Domus Connect



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data
recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
SFEX - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




OPTIONS

- New dosing/vaporizing system
- DomusConnect communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel battery
- Low pressure steam battery
- Wooden packing
- Reverse door opening
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models:
- 440V III 50/60 Hz No N

TECHNICAL DATA		UNIT.	DTT-18 ECO-ENERGY		DTT-23 ECO-ENERGY	
CAPACITY						
Capacity 1/18	Kg	18		26		
Capacity 1/20	Kg	17		23		
Hourly Output ECO-ENERGY*	Kg/h	37-33		44-41		
Evaporation capacity ECO-ENERGY*	l/h	16,3		23		
DRUM						
Ø Drum	mm	750		855		
Ø Door (load hole)	mm	574		574		
Door center height	mm	976		1030		
Load hole bottom height	mm	689		743		
Drum length	mm	746		800		
Drum volume	l	330		460		
POWER						
Drum motor power	Kw	0,37		0,37		
Fan motor power ECO-ENERGY	Kw	0,55		0,75		
Electric heating power ALL RANGES	Kw	18		24		
Total electric power (elec.model) ECO-ENERGY	Kw	18,97		25,17		
Gas heating power ALL RANGES	Kw	20,51		31		
Total electric power (gas model) ECO-ENERGY	Kw	0,97		1,17		
Steam heating power ALL RANGES	Kw	30		49,2		
Steam heating power (gas model) ECO-ENERGY	Kw	0,97		1,17		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A	
Tension 230V - III + T	Nº x mm2 / A	4 x 16/ 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10/ 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	
Ø Gas inlet	BSP	1/2"		1/2"		
Ø Steam inlet	BSP	3/4"		1"		
Ø Condensed (Steam models)	BSP	3/4"		1"		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm	785 / 865		890 / 970		
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255 / 1.345		
Net Height / Gross Height	mm	1.694 / 1.840		1.812 / 1.940		
Height without heating battery	mm	-		-		
Net weight / Gross weight	Kg	187 / 200		210 / 230		
OTHERS						
Max airflow ECO-ENERGY	m3/h	1.200		1.500		
Ø Fume exhaust	mm	200		200		
Sound level ECO-ENERGY	dB	64		65		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

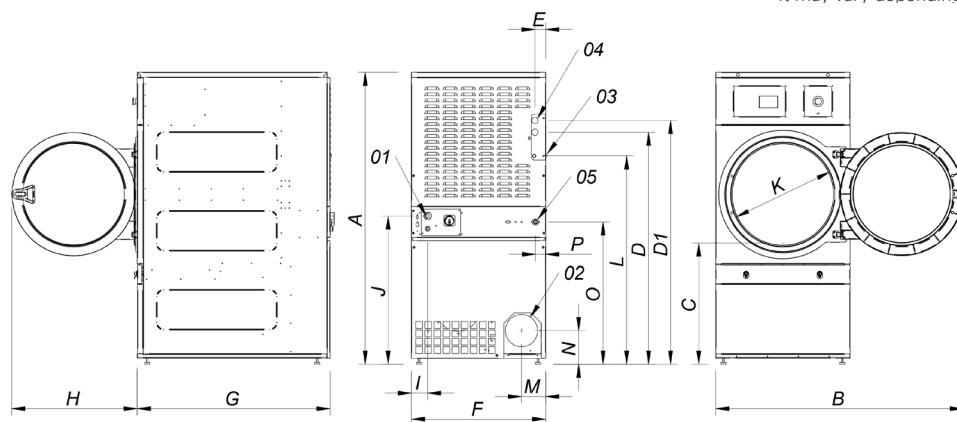

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (DTT-23)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (DTT-23)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DTT-18	1694	1447	689	1354	1422	68	68	785	1125	735	95	870	575	1226	133	180	830	65
DTT-23	1812	1552	743	1430	1532	112	55	890	1255	735	95	920	575	1344	238	180	885	65